(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 30 September 2004 (30.09.2004)

(10) International Publication Number WO 2004/082448 A1

(51) International Patent Classification7:

A47K 10/16

(21) International Application Number:

PCT/KR2004/000624

(22) International Filing Date: 22 March 2004 (22.03.2004)

(25) Filing Language:

(26) Publication Language:

English


(30) Priority Data: 20-2003-0008658 22 March 2003 (22.03.2003)

- (71) Applicant (for all designated States except US): WOOLJI INDUSTRIAL CO. LTD [KR/KR]; 668-22, Joong-ri, Guseong-eup, Yongin-si, Gyeonggi-do 449-916 (KR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LEE, Jong-Ok [KR/KR]; 668-22, Joong-ri, Guseong-eup, Yongin-si, Gyeonggi-do 449-916 (KR).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the

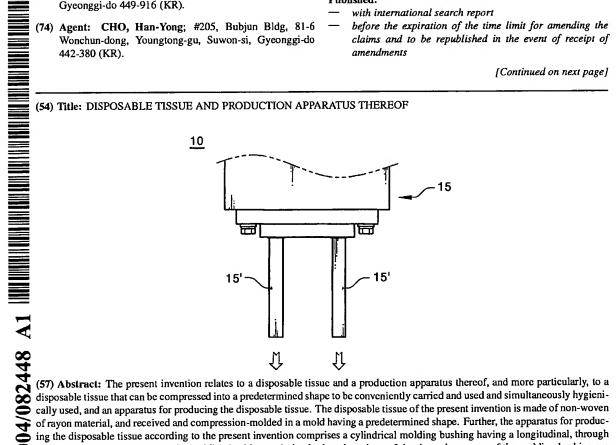

of rayon material, and received and compression-molded in a mold having a predetermined shape. Further, the apparatus for producing the disposable tissue according to the present invention comprises a cylindrical molding bushing having a longitudinal, through passage; a table for supporting the molding bushing such that both end portions of the through passage of the molding bushing are exposed to the outside; an upper press installed vertically movably above the table and having a pressing rod to be inserted into the through passage of the molding bushing when the upper press moves downwardly; and a lower press installed vertically movably below the table and having a supporting rod to be inserted into the through passage of the molding bushing when the lower press moves upwardly.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.